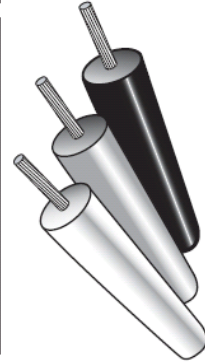


Westwood**IGNITION CABLE**

Cable Type	UL LISTED	W/P No.		
		25' Roll	100' Roll	1,000' Roll
GTO-15	Yes	E60-25	E60-100	E60-1000
HV-15	-	E61-25	E61-100	E61-1000
White Silicone	-	E62-25	E62-100	-
Red Silicone	Yes	E63-25	E63-100	E63-1000

**GTO-15
(black)**

Large .275" outside diameter fits Rajah terminals perfectly. Withstands more than **15,000 VAC** with low current leakage. Resists arc-over, tracking, and burning. Tested to withstand conditions of heat, oil, and moisture. No. 14 gauge, 19 x 26 stranded tinned copper wire. All vinyl insulation affords low temperature flexibility. Flame retardant, will not support combustion. Tough and abrasion resistant, yet easy stripping. Temperature range: -40° F to 140° F (-20° C to 60° C)

**HV-15
(black)**

Large .275" outside diameter fits Rajah terminals perfectly. Withstands more than **15,000 VAC** with low current leakage. Resists arc-over, tracking, and burning. Tested to withstand conditions of heat, oil, and moisture. No. 16 gauge, 19 x 29 stranded bare copper wire. All vinyl insulation affords low temperature flexibility. Flame retardant, will not support combustion. Tough and abrasion resistant, yet easy stripping. Temperature range: -40° F to 194° F (-20° C to 90° C)